

| No. | Outer Material Description | Diameter A | Hole Size B | Hub Width C | Width D |
|-----|-------------------------------|---------------|----------------|----------------|------------|
| 11 | Steel - with deep grove | 1" | 1/4" | 3/8" | 5/16" |
| 12 | Steel | 1 1/8" | 1/4" | 3/8" | 5/16" |
| 15 | Steel | 1 1/4" | 1/4" | 1/3" | 5/16" |
| 16 | Nylon | 1 1/4" | 1/4" | 1/3" | 5/16" |
| 17 | Steel | 1 1/4" | 1/4" | 3/8" | 5/16" |
| 23 | Steel | 1 1/2" | 1/4" | 1/3" | 5/16" |
| 24 | Nylon | 1 1/2" | 1/4" | 1/3" | 5/16" |
| 33 | Stainless Steel | 1 1/2" | 1/4" | 1/3" | 5/16" |
| 32 | Nylon - Heavy Duty (Killian) | 1 11/16" | 1/4" | 1/2" | 3/8" |

ALL WHEELS HAVE BALL BEARINGS AND ARE MADE FOR PATIO DOOR MANUFACTURING COMPANIES

Precision Bearing Wheels




Description:

Completely new design that establishes a new level of quality for Patio Door Rollers.

Design Highlights:

- 1. The core of the wheel is a Precision Bearing that offers extremely smooth rolling.
- 2. The Precision Bearing is factory greased and completely sealed.
- 3. The Outer Tire, that is the rolling surface of the wheel, is made of Stainless Steel to avoid any rust formation between the wheel and the track.
- 4. Using Composite Nylon, the Precision Bearing is assembled with the Outer Tire by an injection molding process.

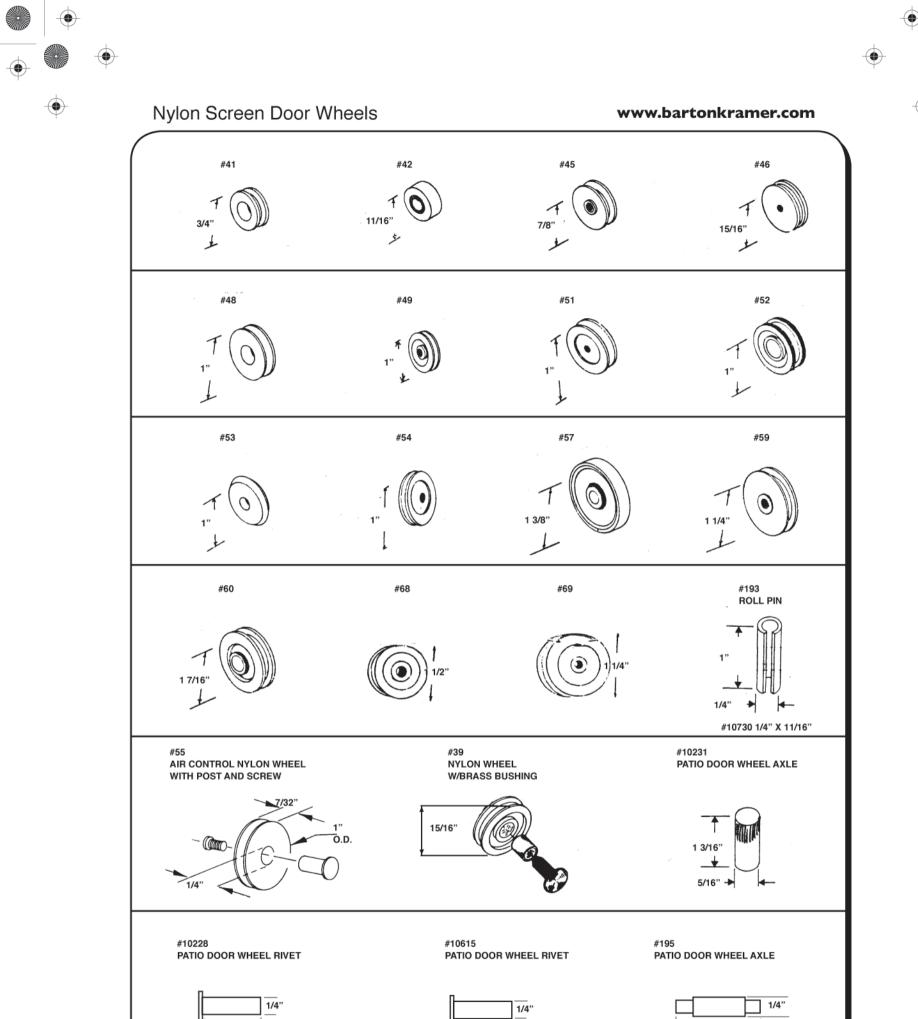

Barton Kramer Inc.

3/4" —



9/16"